



DELEYCON SOUNDSTERS

SMART HIFI WIRELESS HEADSET

active INSTRUCTION

EN

Start here

Package Content

Soft pouch
Ear buds (L, M, S)
USB cable
User manual


Product Overview

Volume + / Previous Track

Volume - / Next Track


Multifunctional Button

Status LED

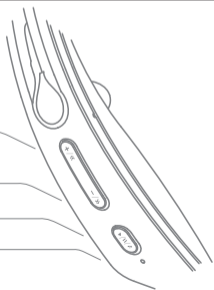

Features

- NFC pairing
- aptX[®] HD Bluetooth audio technologie
- Up to 20 hours operating time
- Incoming call vibration alerts
- 6th Generation CVC noise reduction
- Bluetooth 4.0
- Smart voice alerts
- Multipoint technology up to 2 devices
- iOS displays the headphone's battery status

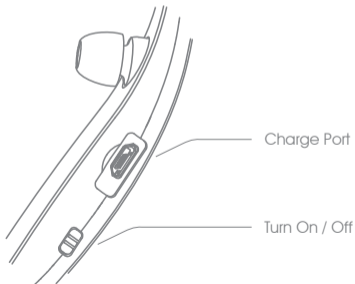

Basic Operation

Volume control

Press the "+" or "-" button to turn volume up or down.

You hear a signal once it reaches the maximum/minimum volume.

Status LED and Voice Message

Instruction	LED status	Voice Message & Signals
Power on	Blue LED for 2 seconds	Power on
Power off	Red LED for 2 seconds	Power off
Pairing	LED flashes red and blue alternately	Pairing
Standby	LED flashes blue twice every 5 sec.	/
Incoming call	LED flashes blue continuously	Vibration alerts
Battery low	LED Flashes red twice every 5 sec.	Battery low
Charging	Red LED while charging Blue LED when fully charged	/

Pairing


Pair One Device

- In off mode press and hold the multifunctional button until the LED flashes blue and red alternately. You hear "Power on" and "Pairing". Now the headphones are in pairing mode.
- Activate Bluetooth on your device and search for visible new devices.
- Select "active". If your phone asks for the passcode, enter 0000 or accept the connection. The LED indicator stops flashing red and blue once successfully paired, you hear "Connection successful".

Pair another Phone


The multipoint technology enables you to pair another device and take a call from either.

To pair with another mobile phone, follow the steps for "Pair one Phone". After successful pairing restart the headset to connect 2 paired mobile phones automatically.

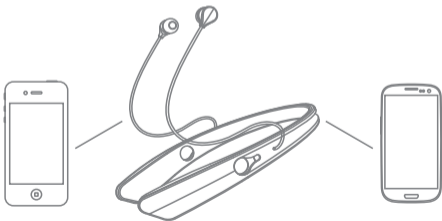

NFC Pairing

Turn on your Bluetooth headset. After 5 seconds hold an NFC device against the NFC zone of the headset. The LED indicator flashes red and blue, you hear voice prompts "Pairing", the LED indicator stops flashing red and blue once successfully paired, you hear the voice prompt "Connection successful".

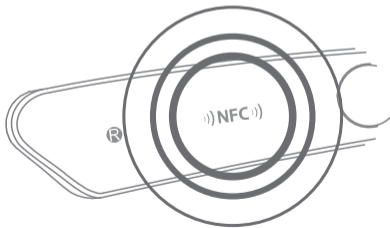

NFC detection area

Call

Answer a call

Press the multifunctional button once.

End a call

Press the multifunctional button once.

Reject a Call

Press and hold the multifunctional button for about 2 seconds.

Redial the last call

Double-press the multifunctional button in standby mode to redial the last called number.

MIC mute on/off

Press and hold the volume button "-" for about 2 seconds to activate/deactivate mute.

Switch between headset and phone

Press and hold the volume button "+" for about 2 seconds during a call and the call will be switched to the mobile phone.

Do this again and the call will be switched back to the headset.

Voice dial (Need phone support)

In standby mode, press the volume buttons "+" and "-", wait for phone prompt and then tell the phone to dial the name of a stored contact.

End current call and answer new call

When a new call rings during a call, press the multifunctional button to answer new call and end current call simultaneously.

Hold on current call and answer new call

When a new call rings during a call, press and hold the multifunctional button for 2 seconds to hold current call and answer new call. To switch between held call and active call, press and hold the multifunctional button for 2 seconds.

Music

(Needs media player support)

Music play / pause

Press the multifunctional button to play / pause music.

Previous track

Press the volume button "+" for 2 seconds to skip track back.

Next track

Press and hold the volume button "-" for 2 seconds to skip track forward.


Switch between music and call

When a call comes in while music is playing, the music stops automatically. Once the call ends or is rejected, the music starts to resume.

More features

Battery Indicator


When the headphone is connected to a device with iOS system, a battery indicator of the "active" will appear at the upper right of the iOS user interface.

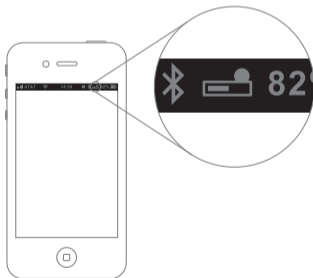

Hardware Reset

Turn on the Bluetooth headset. Press and hold the multifunctional button, then connect the headset to a USB charger. Hardware reset is done.

(Note: The Headset automatically powers off. Please switch the power button to "Off" and then back to "On" to power on the headset)

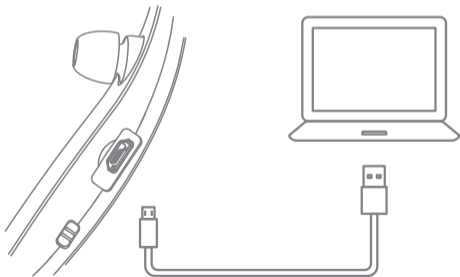

Power-Off

Switch the power button to "Off" position to turn off the headset.

Clear Paired Devices List

Turn on the headset and connect it to your USB charger. Press and hold the volume button "+" and "-" simultaneously for about 5 seconds. When the LED flashes 5 times, the paired list is cleared.

(Note: The headset automatically enters pairing mode when powered on for the first time after clearing the paired list.)

Charging the Battery

When battery is low, you will hear the voice prompt "Battery low".

It takes up to 2.5 hours to fully charge the headset. While charging, the battery indicator LED is red. The indicator LED switches to blue color once charging is complete.

